




DUSTLESS 735 PREMIUM FLEX

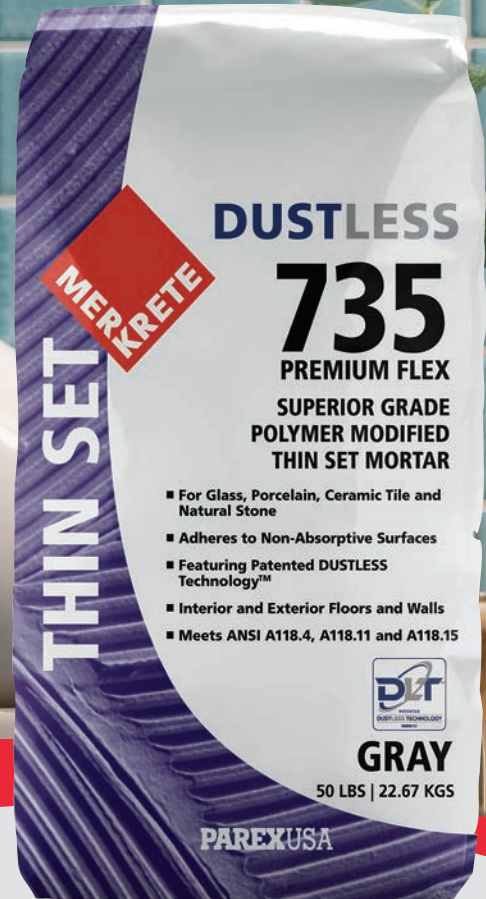

- ◆ SUPERIOR BOND STRENGTH FOR TILE AND STONE INSTALLATIONS
- ◆ HIGH FLEXIBILITY TO PREVENT CRACKS IN TILE
- ◆ FEATURING PATENTED DLT™ DUSTLESS TECHNOLOGY
- ◆ EXCEEDS ANSI A118.15, A118.4 AND A118.11

DLT™ DUSTLESS TECHNOLOGY



- Alleviates most dust
- Easier to spread
- Less mess to clean up
- Longer working time
- Easier to mix
- Uses less water



735 DUSTLESS PREMIUM SET PLUS



Merkrete's 735 DUSTLESS Premium Flex features new, innovative and patented DLT™ DUSTLESS Technology.

735 DUSTLESS Premium Flex is a superior-grade, polymer-modified, multipurpose Portland cement thin set mortar offering flexibility, greater bond strength, and extended adjustability and open times. This mortar contains a high blend of dry polymers resulting in excellent adhesion to the substrate and tile. Innovative DUSTLESS Technology (DLT) produces significantly less dust than ordinary thin sets, promoting cleaner working conditions and reduced mess. It uses less water, is creamier and easier to spread. It can be used for both interior and exterior installations of tile in most residential and commercial floor and wall applications.

STANDARDS:

- Exceeds ANSI A118.15, A118.14, and A118.11 without the need for additives
- ISO 13007-2

SUITABLE TILE TYPES

- Brick and thin brick
- Cement-based pre-cast terrazzo
- Impervious porcelain and glass tile
- Natural stone tile
- Vitreous, semi-vitreous and non-vitreous tile: ceramic, mosaic, quarry, cement body tile

SUITABLE SUBSTRATES:

- Brick masonry
- Cement backer board¹
- Cement mortar beds
- Cement plaster
- Cement terrazzo
- Ceramic tile and stone
- Concrete
- Concrete masonry
- Exterior grade plywood²
- Gypsum wallboard²
- Merkrete waterproofing and crack isolation membranes
- Merkrete Fracture Guard Uncoupling Mat

¹ Consult cement backer board manufacturer for installation recommendations and to verify acceptability for exterior use.

² Interior use only.

RECOMMENDED NOTCH SIZE		
1/4" x 1/4" 6mm x 6mm	1/4" x 3/8" 6mm x 10mm	1/2" x 1/2" 12mm x 12mm
Ceramics	Quarry Tile, Rough Stone	Large Tile, Marble, Stone
APPROXIMATE COVERAGES		
65-75 Ft ² 6.0-6.9m ²	55-65 Ft ² 5.1-6.0m ²	35-45 Ft ² 3.2-4.2m ²

ORDERING INFORMATION		
Item No.	Color	Size
4317	Gray	50 lbs.
4318	White	50 lbs.

PAREXUSA
Parex USA, Inc., a California Corporation

Corporate Office

2150 Eastridge Ave • Riverside, CA 92507
merkrete.com • 866-516-0061
Tech Support: 800-226-2424